

## instructions for use

### CORNER-FITTED MESH SUN SAIL

- The sun sail is installed to shade the specific place and should be used as intended.
- When the summer season ends, the sun sails should be uninstalled, cleaned, dried and stored in a dry place (the fabric can be washed by hand with a sponge or with pressure washers without using any aggressive detergents).
- The sun sails are made of factory white PVC mesh based on polyester with 270 g/m<sup>2</sup> grammage. The material has a B2 certificate for flame retardant materials.
- The sun sail is not a maintenance-free product. It cannot be used when the wind is too strong (which depends on the local conditions such as wind force, angle of wind against the sun sail, wind direction, size of the sun sail) and/or when water, hail or snow accumulates in it. If it is not possible to react to the changing weather on an ongoing basis, the sun sail should be disassembled.
- The sun sail must be inspected for damage regularly. A damaged sun sail cannot be used until it is repaired.
- It is unacceptable for any objects to be placed on the surface of the sun sail. They need to be removed immediately because they might fall down on a random place.
- The sun sail can be installed depending on the aesthetic concept of the site of fitting (Fig. 1.). However, remember that you cannot have a fully flat surface of a sail fitted at its corners only.

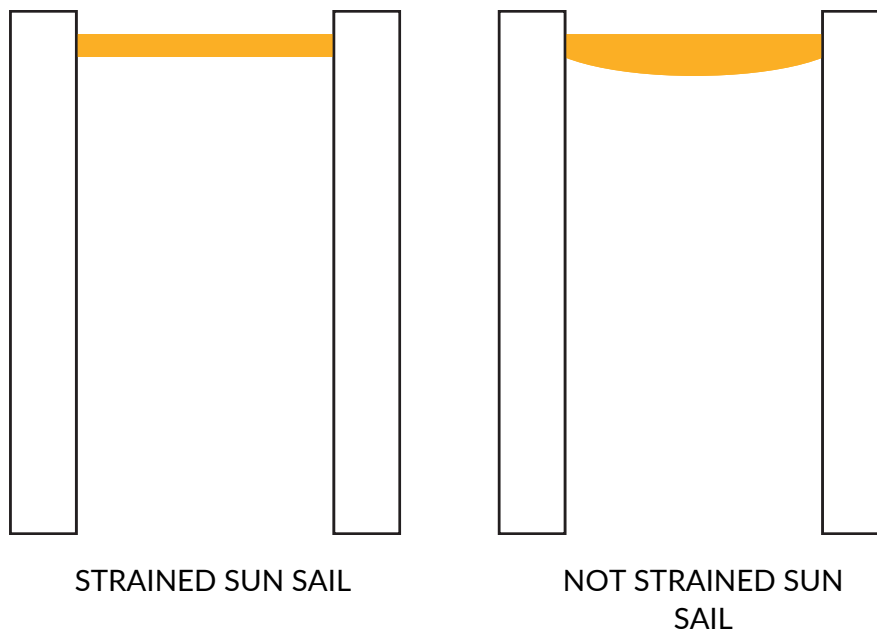


Figure 1. Possible ways of installing the sun sail




**Instructions for use**

**CORNER-FITTED MESH SUN SAIL**

**SUGGESTION FOR INSTALLATION:**

1. Unfold the sun sail flat under the place where it is to be hung.
2. Fix it using the double eyelets (Fig. 2.) in the corners to the previously prepared mounting points (if the sun sail is too small, adjust the distance from the sun sail to the mounting point using, for instance, the ropes available in the optional installation kit) in accordance with the instructional video.

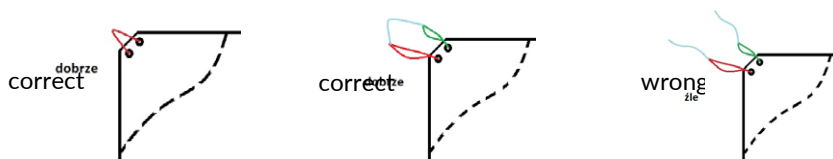

3. Install additional fitting points if the sun sail is equipped with such.
4. Start stretching (e.g. with the bottle screw available in the optional installation kit) the sun sail until the edges of the sun sail are tensioned (if there are any diagonal folds, you need to reduce the tension along this diagonal).

**Purchase the installation kit!**

**sample installation kits include:**



**square/rectangle for wood**

- steel rope 4 sections x 2 m
- bottle screws for tensioning x 2 pcs
- steel rope clamps x 8 pcs
- sail snap rings x 10 pcs
- pad eye plates x 4 pcs
- screws for wood x 8 pcs

**triangle for wood**

- steel rope 3 sections x 2 m
- bottle screw for tensioning x 1 pcs
- steel rope clamps x 6 pcs
- sail snap ring x 8 pcs
- pad eye plates x 3 pcs
- screws for wood x 6 pcs

Haven't you found a proper set?  
Are you looking for a wall, metal or another fixing?  
Ask the advisor!